

# Pro Cable Management

Jan Coetsee

083 297 4395 (WhatsApp)

[info@ceilingpowerpole.co.za](mailto:info@ceilingpowerpole.co.za)

[www.ceilingpowerpole.co.za](http://www.ceilingpowerpole.co.za)

## Cable Ladders - CL55 & CL76



CL55 Light Duty Cable Ladder						
Width (mm)	100	150	200	300	400	500
Material Thickness (mm)	1.6	1.6	1.6	1.6	1.6	1.6

CL76 Medium Duty Cable Ladder									
Width (mm)	100	150	200	300	400	500	600	800	1000
Material Thickness (mm)	1.6	1.6	1.6	1.6	1.6	1.6	1.6	2	2

Standard finish galvanised (HDG)

Welded construction

Special materials & coatings on request

Standard Length: 3000mm


Rung Spacing: 375mm

Slot Size CL55: 17 x 7mm

CL76: 25 x 7mm

Cross Rung Thickness: 1,6mm

Std. Accessory Radius: 450mm

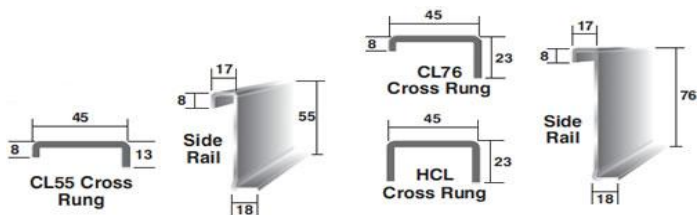

1 x Side Piece = 440 Radius  
 2 x Side Pieces = 650 Radius  
 3 x Side Pieces = 1000 Radius  
 Use to create infinite directional changes

